



GSM

GPS

SMS



User's Manual

VEHICLE TRACKING UNIT 84VT

Congratulations !!! We thank you for purchasing VISIONTEK VEHICLE TRACKING UNIT 84VT equipped with state of the art GPS receiver that provides reliable and accurate navigation data. This User's manual will help you in knowing all the features of the system including installation. Operational and programming procedure in a step by step manner. Please keep this handy manual for easy reference.

For Servicing and other details kindly look at the corporate address and email id at the backside of the manual.

- 1 Introduction
- 2 SIM Installation
- 3 Configuration
- 4 Unit Installation

1 Introduction

Visiontek Vehicle Tracking Unit 84VT, equipped with state of the art GPS receiver provides reliable and accurate navigation data. The unit enables the vehicle owners or third parties to track the location of a Truck, Ship, Container, Car or any object which is moving.

All the communication with the user/server is handled by Tri-Band GSM/GPRS module which accurately delivers all the navigation data. The communication is either through Short Message Service (SMS) or GPRS network.

The Visiontek 84VT is provided with a RS-232 port for configuration of the unit. The unit can be also remotely configured (OTA Configuration). In addition the unit is provided with two switches (One for Voice & One for SMS) for communicating with pre-defined numbers. A voice port is provided for two way communication and buzzer is provided for incoming calls alert. The unit can be configured to receive the incoming calls from pre-defined numbers.




FEATURES:

- Tri-band 900/1800/1900 MHz GSM/Gprs Module
- GPS receiver with 20 channels
- Local and Remote configuration over the air
- Real Time Clock (RTC)
- Wide DC input voltage range (9V-30V)
- RS232 Serial Port
- SMS / Gprs Communication
- Switch for voice & SMS communication
- One SOS switch for sending SMS to pre-defined number
- Support TCP & UDP
- Real Time Clock (RTC)
- On-line and Off-line tracking
- LED indication for GSM, GPS and Power status
- Voice port for two way voice communication (Headset Only)
- Buzzer for incoming calls indication
- Configure upto 5 incoming call numbers
- GSM + GPS Combo antenna

2 SIM Installation

1. The Visiontek 84VT unit can be easily opened by removing the four screws connected as shown in the figure. Make sure that the power cable is not connected to the power source

NOTE : PIN Code of the SIM Card must be DISABLED

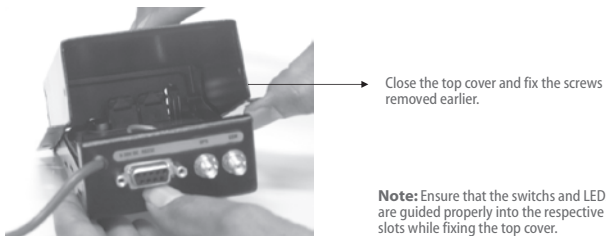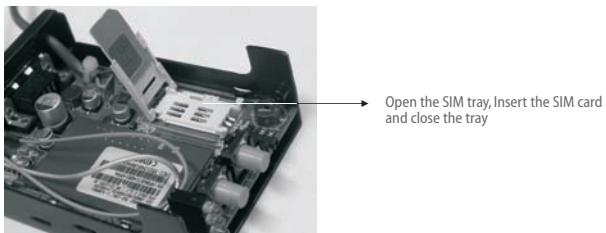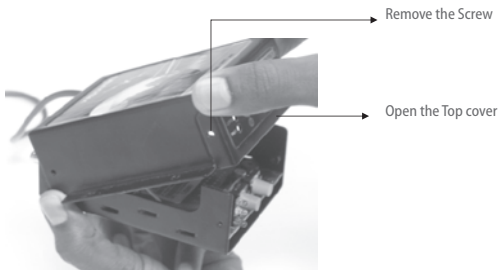

3. Select comport to be used for the configuration from the drop down menu and press "connect".
4. Following options are provided in configuration application.
 1. Priority.
 2. Connection Information.
 3. Service Information.
 4. SMS Message.
 5. Incoming Numbers.
 6. Send.
 7. Clear Data.
 8. Details From VTU.
 9. Configuration History with Delete, Export, Find & Delete All options.

4.1 PRIORITY: Customer can select the communication mode from VTU to the remote server location.

SMS:

- Select "SMS" to send the data using the Short Message Service function.
- When "SMS" option is selected, the unit will send the data to the remote server only through the "SMS" function.
- When selected, all the programmable parameters related to GPRS like IP Address, Port Address, APN, User Name and Password will be disabled.

GPRS:

- Select "GPRS" to send the data using the General Packet Radio System.
- When "GPRS" is not available from the network, the unit will store all the GPS data. When the unit enters to GPRS network, all the stored data will be send to remote server.

OFFLINE

- Select offline to make unit work without GSM.
- When offline option is selected, the unit will store all the GPS data received as per the frequency defined.
- The stored data can be retrieved with the help of offline details option provided.

4.2 CONNECTION INFORMATION: The following details to be provided for making the data transfer from the unit to remote server by GPRS call.

Protocol

Select the protocol to be used for making the communication to remote server when working with GPRS option. The device supports both TCP/IP and UDP.

Port Address:

Enter the Port Address of remote server.

IP Address:

Enter the remote IP number to which the data to be sent.

APN:

Enter the APN for connecting to the GPRS network. APN will be provided by the GSM operator.

User Name:

Enter the User Name (If any) for the GPRS connection.



Password:

Enter the Password (If any) for the GPRS connection.

4.3 SERVICE INFORMATION:

Vehicle ID:

Enter the Vehicle ID to which the unit is connected.

Server Number:	Enter the server number (Mobile Number) to which the data to be sent when “SMS” communication mode is selected.
Voice Number:	Enter the number to which voice communication is required. This number will be activated when the  switch on the unit is pressed.
SMS Number:	Enter the number to which SMS to be sent when  switch is pressed. Pre-defined message will be sent.
OTA Service No.:	The VTU can be configured remotely through SMS. Enter the number (GSM) from which the unit should accept the Over the air Configuration.
GPS Frequency:	Enter the time duration for which the unit should read the GPS parameters. The time can be from 001 seconds to 255 seconds.
GSM Frequency:	Enter the time duration for which the unit should send the received data to the remote server. The time duration entered here will be applicable for both “SMS” and “GPRS”.
GMT Time Offset:	Select the country GMT time difference. In case of India it is +0530.
OTA:	Select the check box when configuring the remote unit. Uncheck the box when configuring the unit locally by connecting to PC.
Remote Number :	Enter the SIM number of the remote unit. The OTA message will be sent to the number entered.

4.4 SMS MESSAGE:

- Enter the pre-defined message content to be sent when the  switch is pressed.

4.5 INCOMING NUMBERS:

- Enter the incoming numbers to be allowed. Any number received by the unit other than the entered numbers will not be allowed.
- A maximum of 05 numbers can be entered.

4.6 Send:

- Select the send option to store all the configured parameters in to the unit.

4.7 Clear Date:

- Select the option to clear all the parameters displayed on the screen.

4.8 Details from VTU:

- Select the option to read configuration details stored in VTU.

4.9 GPS Details:

- User can select the GPS parameters in the required format.

4.10 Offline Details:

- The location details stored in the unit can be retrieved with this function.

4.8 Configuration History:

- When “Send” option is selected, all the parameters configured will be stored into the unit and the same are stored in the configuration history.
- Customer can recall the configuration history as and when required for review. The application will store approximately 1000 configurations.

4.9 Edit:

- Select any configuration details from the history and select “Edit” to edit the details. The edited details can be stored in to the unit.

4.10 Export:

- Select the function to Export the configuration history details.

4.11 Find:

- Select the function to find the configuration details of a particular vehicle from the history.

4.12 Delete All:

- Select to delete the configuration history details.

4.13 Close:

- Select to close the application.

NOTE: After completion of the configuration, switch OFF & ON the VTU.

3 Unit Installation

- 1. Initial Setup for Installation:** Select the location where the unit to be fixed / installed. Connect the GSM antenna to the GSM connector provided on the unit. Connect the GPS antenna to the GPS connector provided on the unit. GSM & GPS marking is provided near to the connectors for easy identification.

For good GPS coverage, make sure that the GPS antenna has a clear view at the sky preferably outdoors. Ensure that the top of the antenna is aimed at the open sky.

- 2. Power Connection:** Connect the unit to DC power source/battery for Power ON. Ensure that the input voltage to the unit is between 9V DC to 30V DC.

When the units is powered ON, all the three LED's (Red, Yellow and Green) related to power, GSM and GPS will glow continuously and after some time, the unit will give “Beep” sound indicating that the unit is ready.

3. LED Indications

LED	Status	Flashing
Red	Unit Power ON	
Yellow	Searching for GPS GPS Not available.	GPS Fix available
Green	Searching for the GSM network. GSM Network not available.	GSM Network available. Note: The LED will flash at higher speed when sending data to remote server.

NOTE: When the unit is in programming mode, Yellow and Green LED's will not glow and only Red LED will glow with low intensity.

WARRANTY

VISIONTEK 84VT, Vehicle Tracking Unit is warranted for a period of 12 months from the date of sale against manufacturing defects. GSM, GPS antennas and Battery are warranted for six months against manufacturing defects. Linkwell Telesystems Pvt. Ltd., obligation under this warranty shall be limited to servicing or replacing the defective parts provided that notice of such defects and satisfactory proof thereof is given to Linkwell Telesystems Pvt. Ltd.

The warranty does not cover any defect in the product caused by accident, misuse, mishandling, negligence, alteration, modification or substitution of any of the components or parts or any attempt at internal adjustments, any form of tampering by unauthorized/unskilled service personnel, loss of components or accessories, natural calamities and over voltage of electricity.

Under no circumstance shall Linkwell Telesystems Pvt.Ltd., be liable for any consequential or resulting injury or for loss, damage or expenses directly or indirectly arising from the use of this product Linkwell Telesystems Pvt. Ltd. will make every effort to carry out repairs/replacement under this warranty as early as possible and it is expressly made clear that the company shall not be liable to do so within any specified time or period.

The decision of Linkwell Telesystems Pvt. Ltd. as to the nature of the defect and applicability of this warranty shall be final. Claims if any, to this warranty shall be only made before the courts having jurisdiction in Secunderabad, Andhra Pradesh, INDIA.

Product Pictures



Connectors



LED Indicators

Linkwell Telesystems Pvt. Ltd.

Gowra Klassic, 1-11-252/1/A, Begumpet, Hyderabad - 500 016. Andhra Pradesh, INDIA.
Ph. : +91-40-66388000 | Fax : +91-40-66388006, 27763838

info@visiontek.co.in | www.visiontek.co.in

BRANCHES: NOIDA - 0120-2549090, 2549095, 2541427, 2541437 | KOLKATTA - 033-22176549, 22169301 | AHMEDABAD - 079-40062001, 40062002 | MUMBAI - 022-24916940, 24916942 | VIZAG - 0891-2550725, 2564752, 2508088 | BANGALORE - 080-25598811, 25550729, 25591457 | CHENNAI - 044-24797950, 24797960 | KERALA - 94471-37717