

# Three Phase Energy Meter 37TM



## Overview

VISIONTEK 37TM Three Phase Electronic Energy Meter is designed to meter residential and commercial category consumers in distribution networks. The meter is targeted at the deregulated energy markets which require flexible tariff structures and a modern energy management. 37TM is a perfect combination of well-proven metering technology sealed in a single enclosure with multiple communication interface options. 37TM Energy Meter complies with IS-13779, CBIP-TR 88/304 and communication protocol in accordance with BIS ICS ETD 13 doc 6211 (IS 15959) Category C for interoperability.

Event Logging

TOD Metering

Load Profiling

Remote Meter Reading

## Features

- Class 1.0 accuracy compliance with IS/IEC standards
- LCD for display of measured parameters & for anomaly conditions
- LED indications for calibration of active energy & reactive energy
- Billing point registers storage up to last 12 months
- Programmable TOU / TOD
- Event logging of anomaly conditions and cover open detection
- Ultrasonic welding option
- Programmable load profile for 15 or 30 or 60 minutes interval for kWh, kVAh, voltages, currents
- Optical communication port / IR\* for local meter reading
- RS 232 port\*, Inbuilt LPRF module\* for Remote Meter reading
- Meter reading in absence of mains with built-in battery
- High immunity to magnetic influence and electrostatic discharge
- Sealing provision for meter cover & base and terminal cover




Optical Communication Port

For more information on products visit : [www.smart-energy-meters.com](http://www.smart-energy-meters.com) or email : [energymeters@visiontek.co.in](mailto:energymeters@visiontek.co.in)



# Supporting Utilities

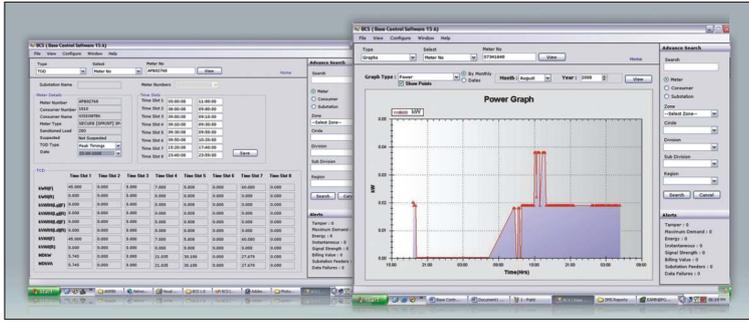


Meter Reading Software 36MS



Meter Reading Cable

## Specifications

Connection Type	Three Phase Four Wire
Accuracy	Class 1.0 as per IS-13779, IEC 62052-11/IEC 62053-21, CBIP TR 88 / 304
Voltage	3 x 240V (L - N) Operating : -40 % to +20 %
Current	10-60A, 5-30A*, 10-40A*, 10-100*, 20-100A*
Power Factor Range	Zero lag – Unity – Zero lead
Frequency	50 Hz ± 5%
Starting Current	0.2% of Ib at Vref, UPF
Power Consumption	Voltage Circuit: 1.5W/8.0VA   Current Circuit: 4.0VA
Display	LCD with backlit, 8 digit 7 segment display for parameters & icons for anomaly conditions
Real Time Clock	± 3 min per year
Communication Interfaces	Optical port Hardware compatible to IEC62056-21 * IR port * RS 232 port (RJ 11) * Inbuilt LPRF module * Communication protocol as per BIS ICS ETD 13 (6211) Category C
Data Storage	Non-volatile memory with a retention time of minimum 10 years
Measured Values / Units	Active energy Reactive energy Apparent energy Maximum Demand kW/Rising Demand* Maximum Demand kVA/Rising Demand* Instantaneous Phase wise Voltages Instantaneous Phase wise Currents Instantaneous Frequency Instantaneous Power Factor
Maximum Demand (MD) Register	Programmable Integration period for 15 or 30 or 60 minutes Sliding window or Fixed window method
Billing registers	Up to last 12 months bill point registers
Time of Use / Time of Day	Programmable time zones
Tariff registers	Programmable tariff registers
Events Logging	Missing Potential ; Potential Unbalance* ; High Potential* ; Low Potential* ; Current Reversal ; Current Circuit High* ; Current Circuit Low* ; Current Unbalance* ; Current Circuit open ; Current Circuit short (bypass) ; Neutral Disturbance ; Power ON / OFF ; Top Cover Open Detection ; Magnetic Influence ; Low Power Factor* ; Over Load*
Temperature Range	-10° to 60° C
Humidity	≤95%
Enclosure	IP 51
Weight	1.4 Kg ± 100 gms
Dimensions (L x W x H) in mm	232 x 192 x 96



Meter Connection Diagram

Note: We pursue a policy of continuous research and product development. Specifications and features are subject to change without notice

\*Indicates optional feature



Linkwell Telesystems Pvt. Ltd. 1-11-252/1B, Behind Shoppers Stop, Begumpet, Hyderabad 500 016, Telangana, INDIA  
Telephone: +91 40 66388000, Fax: +91 40 66388006, 27763838 e-mail: [info@visiontek.co.in](mailto:info@visiontek.co.in) [www.visiontek.co.in](http://www.visiontek.co.in)